DIRECTIONS FOR USE:

This product must be used in accordance to the following directions by HVACR professionals only.

- 1. Goggles, gloves, and other protective garments should be worn when using this product. System must be shut off.
- 2. Apply using any of the Nu-Calgon sprayers or other durable, low pressure, plastic sprayer.
- 3. Prepare cleaning solution by mixing one part Tri-Pow'r[®] HD with four parts water. Add the water to the sprayer first, then add Tri-Pow'r HD.
- 4. Spray Tri-Pow'r HD solution onto dirty surface and allow it to remain in contact for 5 minutes.
- 5. Rinse thoroughly with water.
- 6. Apply Cal-Shield[®] as a coil protectant and return system to service.


7. Rinse out spraver, spraving wand and nozzle.

8. When the container is empty, rinse, replace cap and dispose of properly.

EVAPORATORS: Cleaning an evaporator coil in a "no-rinse" procedure can be done by preparing a solution of 1 part Tri-Pow'r HD to 10 parts water and applying with a sprayer. If this application is used, do so only where there is sufficient humidity being condensed from the air to provide rinsing.

PERMANENT FILTERS: When cleaning greasy components in a tub, add 1 ounce of Tri-Pow'r HD to each gallon of water. Allow parts to soak for 15 () minutes then rinse thoroughly with water.

DILU	TION CHART	
Outdoor Coil - Light Soil	1 part Tri-Pow'r HD : 8 parts water	
Outdoor Coil - Medium Soil	1 part Tri-Pow'r HD : 6 parts water	
Outdoor Coil - Heavy Soil	1 part Tri-Pow'r HD : 4 parts water	
Indoor Coil - "No Rinse"	1 part Tri-Pow'r HD : 10 parts water	
NOTE: For best results, do not use T part cleaner to three parts water.	ri-Pow'r HD undiluted or any stronger than one	. (

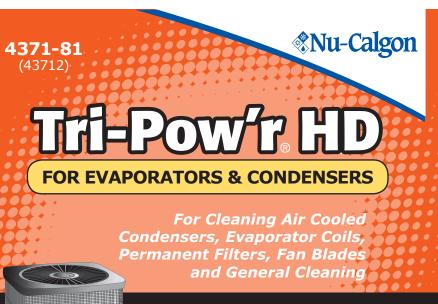

Detergency • **Degreaser** • **Deodorizer Ideal for Microchannel Coils** Metal Safe

FOR PROFESSIONAL USE ONLY

55 U.S. Gallons (208.18 Liters)

AFFECT ON ROOFING MATERIAL: Depending on its composition and condition, the color and finish of roofing material can be affected by coil cleaners (e.g. discoloration or tarnishing). It is recommended that the coil cleaner be tested on a small area of the roof prior to cleaning, particularly galvanizing or standing seam metal roofs. Do not use on aluminum or aluminum-coated surfaces.

RUBBER ROOFS: In general, the product is safe on rubber except where the rubber roof is impregnated with aluminum chips (i.e. modified bitumen roof); do not use on rubber roofs that contain aluminum. In these circumstances, use CalClean, Cal-Green, Green Clean or Tri-Pow'r HD - first evaluate in a small test area.

PREVENTION: Keep only in original packaging. Do not breathe mist or vapor. Wash thoroughly after handling. Wear protective gloves/protective clothing/eve protection/ face protection.

RESPONSE: Absorb spillage to prevent material-damage. **IF SWALLOWED:** Rinse mouth. Do NOT induce vomiting. IF ON SKIN (OR HAIR): Take off immediately all contaminated clothing. Rinse skin with water or shower. Wash contaminated clothing before reuse. IF INHALED: remove person to fresh air and keep comfortable for breathing. Immediately call a POISON CENTER/doctor. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.

STORAGE: Store in a corrosion resistant container with a resistant inner liner. Store locked up. KEEP OUT OF REACH OF CHILDREN.

DISPOSAL: Dispose of contents/container in accordance with local/regional/national/ international regulations.

Contains: Potassium Hydroxide (CAS # 1310-58-3), Sodium Silicate (CAS # 1344-09-8), and Sodium Carbonate (CAS # 497-19-8).



CHM00443

4371-81 Tri-Powr HD 55 gal

DANGER

Causes severe skin burns and eye damage. May be corrosive to metals.

> Nu-Calgon 2611 Schuetz Rd St. Louis, MO 63043

Customer Service: 800-554-5499 Chemical Emergency: 800-424-9300 www.nucalgon.com (518) Calgon is a licensed trade name.