Alka-Brite[®] Plus is an alkaline-based (non-acid) cleaner and brightener, Product is formulated with the best available ingredients and superior surfactants to quickly penetrate and remove greasy soils and oxidation. Its high foaming, biodegradable formula effectively lifts debris and greasy deposits out of coil, leaving finned coils clean and bright.

APPLICATION:

Outdoor air conditioning coils of aluminum or copper fin construction. For painted fin or microchannel coils, consider Tri-Pow'r® HD, Cal-Green™, CalClean®, or TriClean 2x™. DOES NOT CONTAIN ACID. DO NOT USE ON INDOOR COILS, NOT FOR INDOOR USE.

DIRECTIONS FOR USE:

This product must be used in accordance to the following directions by **HVACR** professionals only.


- 1. Goggles, gloves, and other protective garments should be worn when using this product. System must be shut off.
- 2. Apply only with one of the durable Nu-Calgon low pressure poly sprayers.
- 3. Prepare cleaning solution by mixing one part Alka-Brite Plus with four parts of water. Add the water to the sprayer first, then add the Alka-Brite Plus.
- 4. Spray Alka-Brite Plus onto dirty coils and allow it to remain in contact with the dirty surfaces for 5-10 minutes.
- 5. Rinse thoroughly with water, ensure cleaning solution is removed from the coil.
- 6. Apply Cal-Shield® as a coil protectant and return system to service.
- 7. Rise out sprayer, spraying wand, and nozzle.
- 8. When the Alka-Brite Plus container is empty, rinse, replace cap and dispose of properly.

DOES NOT CONTAIN ACID.

DO NOT USE ON INDOOR COILS. NOT FOR INDOOR USE.

DILUTION CHART	
Outdoor Coil - Light Soil	1 part Alka-Brite + : 8 parts water
Outdoor Coil - Medium Soil	1 part Alka-Brite + : 6 parts water
Outdoor Coil - Heavy Soil	1 part Alka-Brite + : 4 parts water



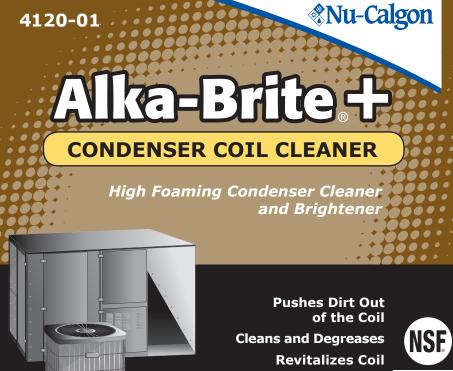

FOR PROFESSIONAL USE ONLY

Nonfood Compounds Program Listed P1 Registration # 146045

AFFECT ON ROOFING MATERIAL: Depending on its composition and condition, the color and finish of roofing material can be affected by coil cleaners (e.g. discoloration or tarnishing). It is recommended that the coil cleaner be tested on a small area of the roof prior to cleaning, particularly galvanizing or standing seam metal roofs. Do not use on aluminum or aluminum-coated surfaces.

RUBBER ROOFS: In general, the product is safe on rubber except where the rubber roof is impregnated with aluminum chips (i.e. modified bitumen roof); do not use on rubber roofs that contain aluminum. In these circumstances, use CalClean, Cal-Green, Green Clean or Tri-Pow'r HD first evaluate in a small test area.


PREVENTION: Keep only in original container. Do not breathe mist or vapor. Wash face, hands and any exposed skin thoroughly after handling. Wear protective gloves/protective clothing/eye protection/face protection.

RESPONSE: Absorb spillage to prevent material damage. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a POISON CENTER or doctor/physician. IF ON SKIN (or hair): Remove/Take off immediately all contaminated clothing. Rinse skin with water/shower. Wash contaminated clothing before reuse. IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Immediately call a POISON CENTER or doctor/physician. IF SWALLOWED: Rinse mouth. Do NOT induce vomiting. Immediately call a POISON CENTER or doctor/physician. For additional information, consult Safety Data Sheet (SDS). KEEP OUT OF REACH OF CHILDREN.

STORAGE: Store in corrosive resistant container with a resistant inner liner. Store locked up. **DISPOSAL:** Dispose of contents/container in accordance with local/regional/national/ international regulations.

Contains Sodium Hydroxide (CAS # 1310-73-2).









DANGER

Causes severe skin burns and eye damage. May be corrosive to metals.





2611 Schuetz Rd St. Louis, MO 63043 Customer Service: 800-554-5499 Chemical Emergency: 800-424-9300 (518) Calgon is a licensed trade name.

Nu-Calgon

55 U.S. Gallons (208.18 Liters)